

Eastto Neat Cutting Oil 333


INTRODUCTION: EASTTO NEAT CUTTING OIL 333 contains fatty oil and inactive sulphur additives to improve machinability with wide range of operations. With the reduction of wearing of tool, EASTTO NEAT CUTTING OIL 333 gives better surface finish without discolouration of the components.

APPLICATION: EASTTO NEAT CUTTING OIL 333 is recommended for multipurpose machining operations like drilling, gear hobbing, cutting, broaching, and gear tooth grinding, gear chamfering of ferrous and non-ferrous metals where severity of machining is not encountered.

PERFORMANCE LEVEL : EASTTO NEAT CUTTING OIL 333 meets the requirement of IS 3065-1985, TYPE II, Grade 3 (RE-AFFIRMD 1995)

| CHARACTERISTICS | EASTTO NEATCUTTING OIL 333 |
|--|----------------------------|
| Kinematic Viscosity at 40°C, cSt | 32 - 36 |
| Flash Point, COC,°C | 170 |
| Copper Strip Corrosion for 3 Hrs. at 100°C | 1 |
| Sap Value, mg KOH/gm | 4 |

PACKING: 210 Litres Drums

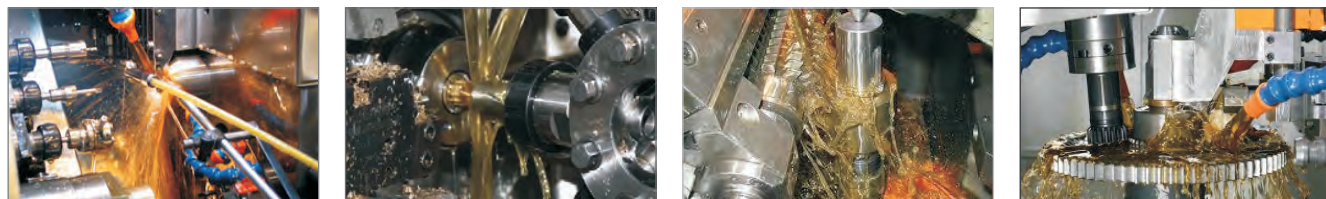

Eastern Petroleum Private Limited

Regd. Off.:
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



Eastto Neat Cutting Oil 333