

## Eastto Hydraulic Oils Hvi

GRADE: VG 32, 46, 68, & 100

**INTRODUCTION:** EASTTO HYDRAULIC OILS HVI – 32, 46, 68 & 100 - are premium grade high viscosity index hydraulic oils which have excellent shear stability and can withstand wide range of temperatures. These oils contain special additive package that reduces wear, rust, oxidation, etc, and imparts good hydrolytic stability and water separation characteristics. Good anti-foam and air release properties ensure smooth operation and system efficiency. They have excellent compatibility with seals normally used in hydraulic system.


**APPLICATION:** EASTTO HYDRAULIC OILS HVI are mainly recommended for hydraulic excavators of Tata–Hitachi, L & T, Komatsu, etc. and can also be used for suitable industrial applications.

**PERFORMANCE LEVEL:** DIN 51524 Part 3

### TYPICAL PROPERTIES:

CHARACTERISTICS	EASTTO HYDRAULIC OIL HVI			
	32	46	68	100
Kinematic Viscosity at 40°C, cSt	30 to 34	44 to 48	66 to 70	95 to 105
Viscosity Index, Min.	105	150	135	130
Flash Point, COC, °C, Min.	190	210	200	210
Pour Point, °C. Max.	-39	-39	-33	-27

**PACKING:** 210 Litres Drum

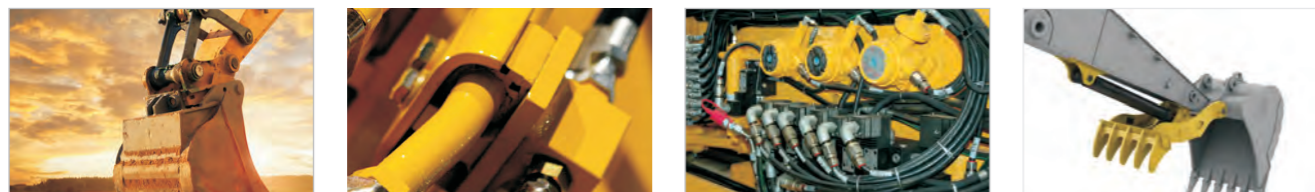

### Eastern Petroleum Private Limited

**Regd. Off.:**  
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,  
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.  
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990  
Email: office@easternpetroleum.in, office@eastto.in,  
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



## Eastto Hydraulic Oils HVI