


PRODUCT DATA SHEET

PRODUCT: EASTTO TURBINE OILS

GRADES: 32, 46, 57, 68, 100

INTRODUCTION: These oils are blended from highly refined base stocks and antioxidant, rust inhibitor and antifoam additives. They have excellent thermal stability and demulsibility properties.

APPLICATION: Recommended for lubrication of steam, gas and hydraulic turbines. It can be also used in Circulating systems, Anti-friction bearings, enclosed gears, Hydraulic units and other industrial applications.

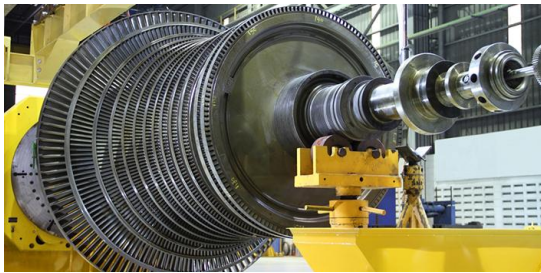

Used for lubrication of turbines

PERFORMANCE LEVEL: Meet BIS – 1012 - 1987 (Reaffirmed 1993), Meet General Electric GEK 27070 Specification, KWU (Siemens) W. Germany.

TYPICAL PROPERTIES:

EASTTO TURBINE OILS					
CHARACTERISTICS	32	46	57	68	100
Kinematic Viscosity @ 40°C, cst	32	46	57	68	100
Viscosity Index	100	98	95	95	95
Flash Point (COC) °C	200	200	210	210	220
Rust Test	Pass	Pass	Pass	Pass	Pass
Water Separation Test	Pass	Pass	Pass	Pass	Pass
Pour Point, °C	-6	-6	-6	-6	-6

PACKING: 210 Litres Drum

Date of issue : 01.09.2009

Date of revision: 09.08.2016

PDS No. 03.01.01 – 03.01.05

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

